




B.21

SHOTBOLT IP40
LOCKING POWER ON

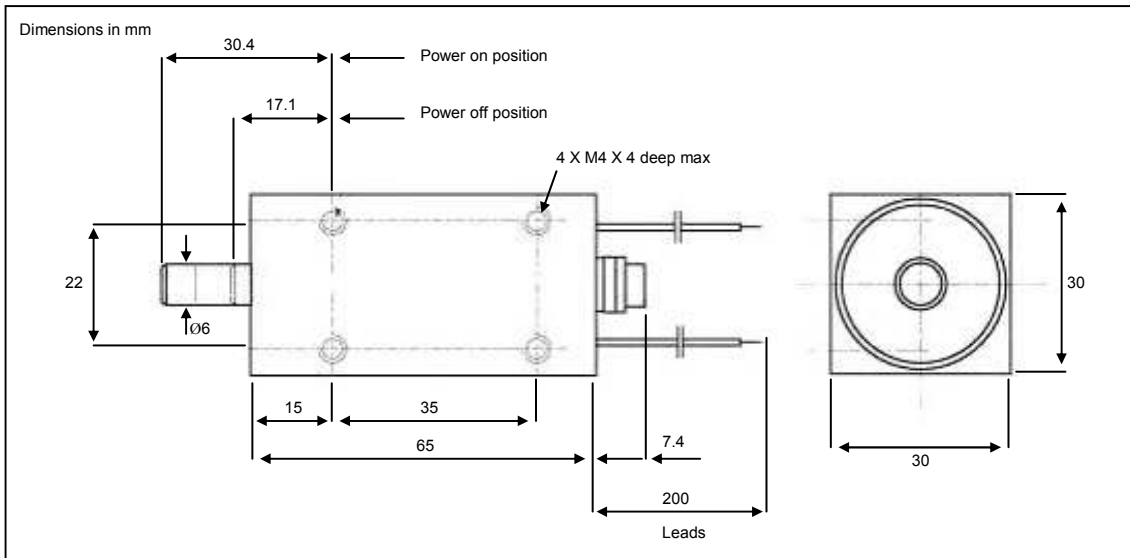

BDC.21

Maximum radial force: **60kg**

Plunger output and input force: **100g**

Standard voltage: **24V DC**

Possible voltages: **12V DC - 200V DC**

Nominal force: **9W - 20°C**

Operating mode: **Permanent service**

Maximum duty cycle: **100%**

Isolation group: **0**

Protection: **IP40**

Service operating temperature: **-5°C, +40°C**

Thermal class: **B**

Total weight: **350g**

Example of use:

Cover locking

Door locking

Master controller locking

Protector locking