



B.21 SHOTBOLT SOLENOID LOCKING POWER ON IP40

BDC.21

Stroke: **13mm**

Maximum radial force: **60kg**

Input and output force: **100g**

Standard voltage: **24V DC**

Possible voltages: **12V DC - 200V DC**

Power: **9W - 20°C**

Maximum duty cycle: **100% (Permanent service)**

Return spring: **Internal**

Protection: **IP40**

Service operating temperature: **-5°C, +40°C**

Temperature rating: **B**

Total weight: **350g**

According to standards: **NF C 79-300**


Example of use:

Cover locking

Door locking

Master controller locking

Protector locking

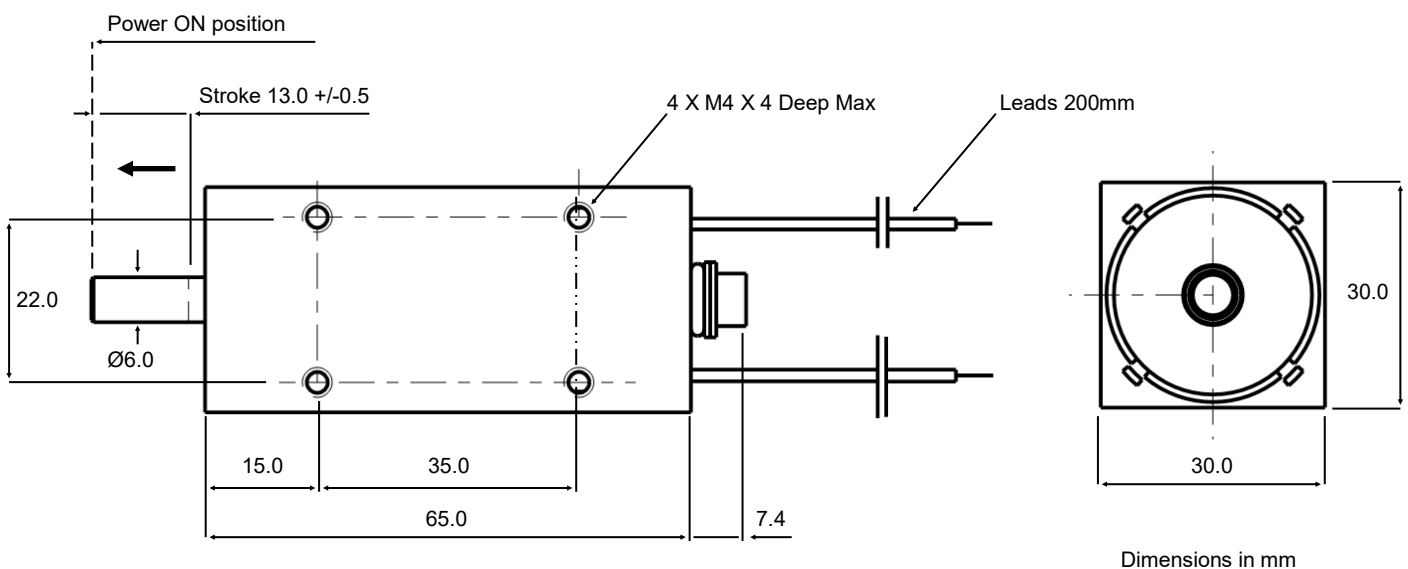

We reserve the right to alter or amend designs without prior notice.

B21 Rev 2 - 2017

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 — 663130 F. +44(0)1638 667434 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk