




B.24PM
SHOTBOLT SOLENOID
LOCKING POWER ON
WITH POSITION MONITORING
IP54

BDC.24PM and BAC.24PM

- Maximum radial force: **135kg**
- Plunger Input and output force: **500g**
- Standard voltage: **24V DC - 230V AC**
- Possible voltages: **12V - 220V DC**
24V - 230V AC (-10%, +5%)
- Nominal force: **18W-100% (Permanent Service)**
- Position monitoring: **1 NC standard contact**
- Return spring: **Internal**
- Service operating temperature: **-5°C, +40°C**
- Protection rating EN 60 529: **IP54**
- Thermal class: **B**
- Total weight: **1.1Kg**
- According to standards: **NF C 79-300**

Example of use:

- Cover locking
- Door locking
- Manipulator locking
- Dust cover locking

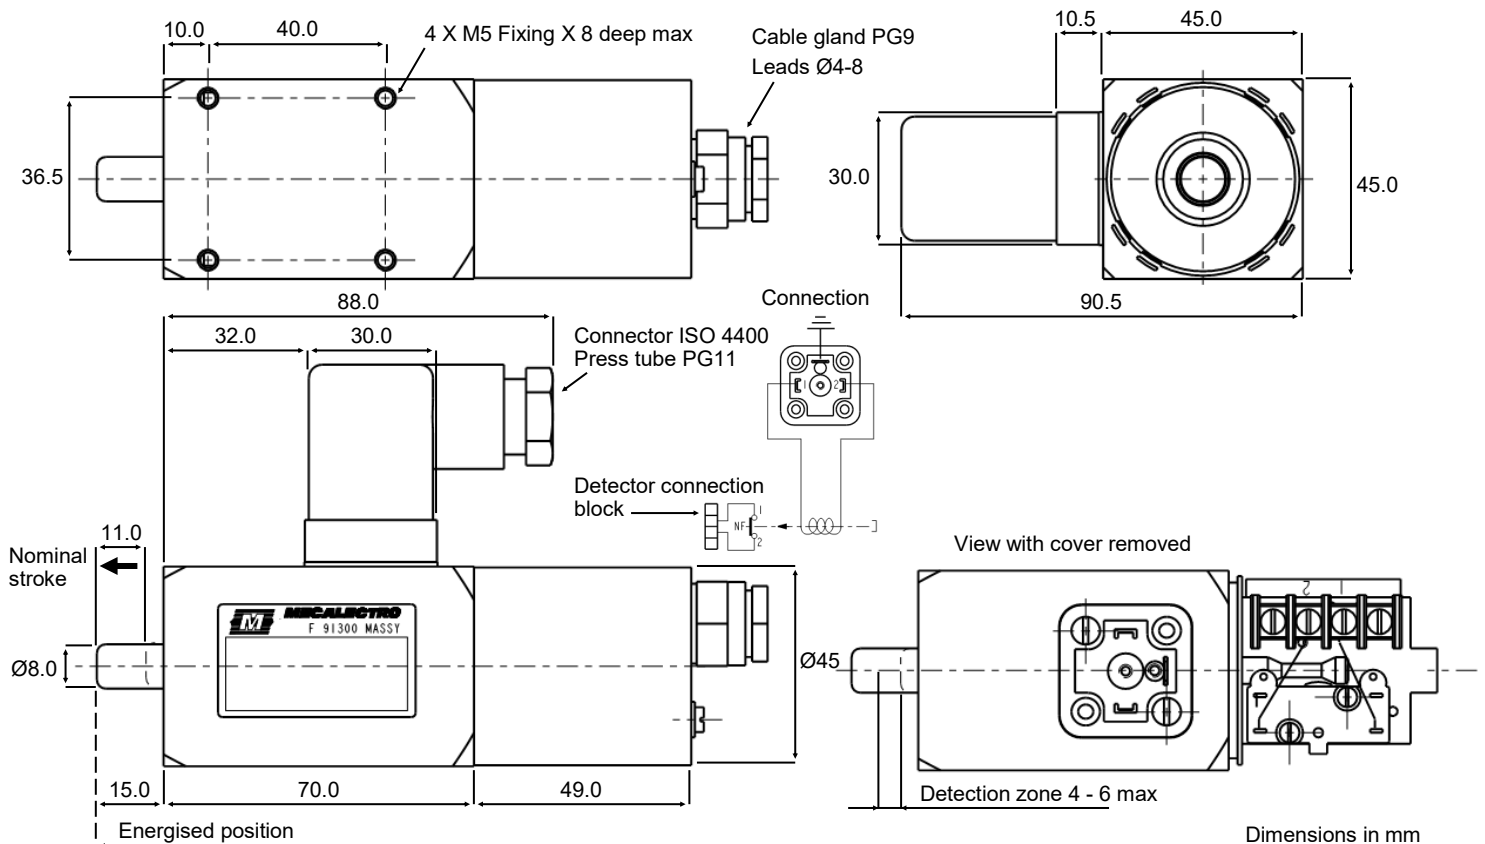

We reserve the right to alter or amend designs without prior notice.

B24PM Rev 2 - 2017

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 — 663130 F. +44(0)1638 667434 E. sales@hebsenson.co.uk www.hebsenson.co.uk