






**B2**  
**AC & DC LINEAR SOLENOID**

**Availability**  
AC or DC  
PULL - THRUST - PULL & THRUST  
Side Mount Fixing  
For operation over 50VDC  
please enquire as to feasibility.

**Solenoid shown in energised position**


Weight complete 57g  
Plunger weight 10g max

Forces shown at working temperature

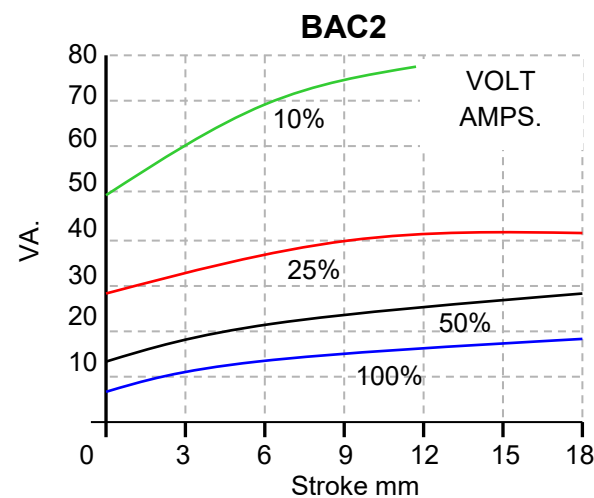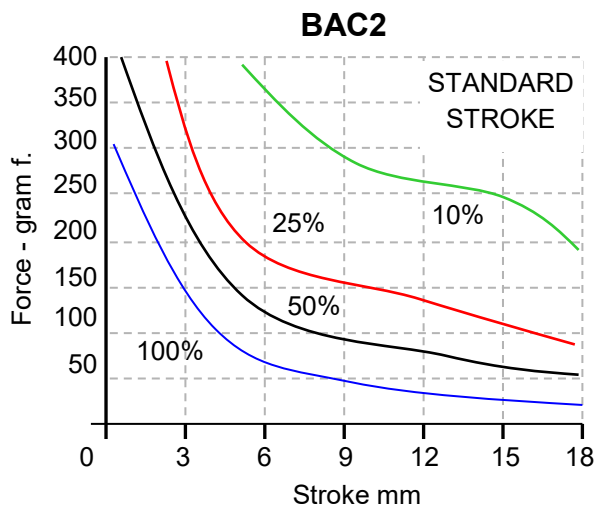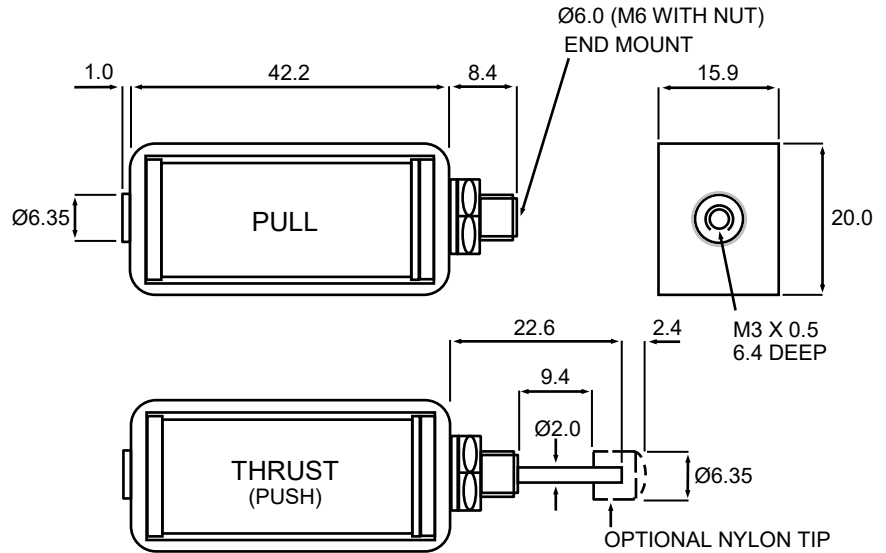


**AC Closed VA**  
100% Rtg = 6.5VA  
50% Rtg = 14VA  
25% Rtg = 24VA  
10% Rtg = 50VA

**DC Watts**  
100% Rtg = 5W  
50% Rtg = 10W  
25% Rtg = 20W  
10% Rtg = 50W

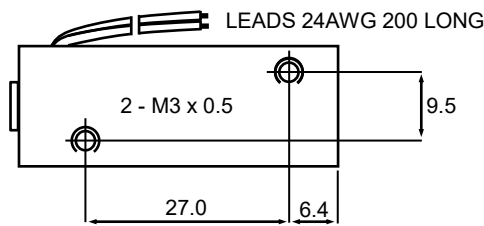

SIDE FIXING OPTION AVAILABLE  
(END MOUNT CAN BE OMITTED)

DIMENSIONS IN MM

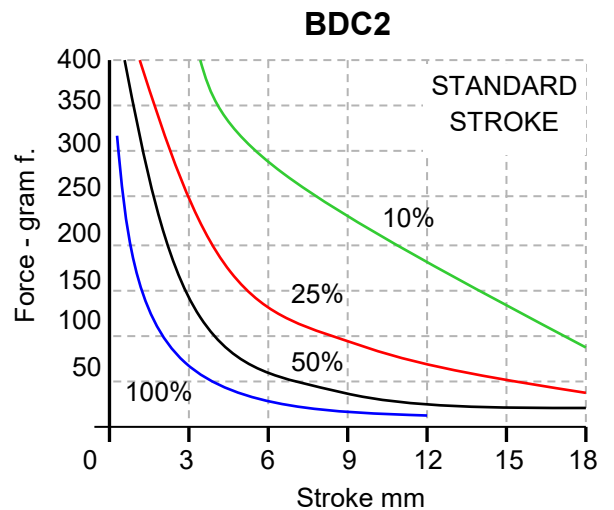

\*\* Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised \*\*  
We reserve the right to alter or amend designs without prior notice.

**HE & BS Benson Ltd**

**1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR**

**T. +44(0)1638 663535 – 663130 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk**

B2 Rev 6 - 2019