






BMO-0630S
DC LINEAR SOLENOID

DC THRUST TYPE (Push)
PULL - PULL & THRUST Available
Standard Voltages 12V & 24V.


Solenoid shown in energised position

Weight complete 42g
Plunger weight 5g max

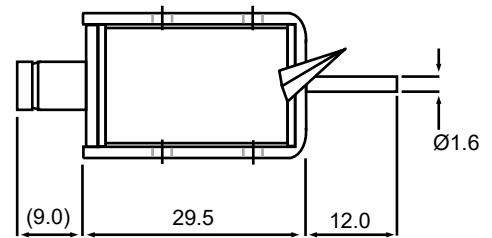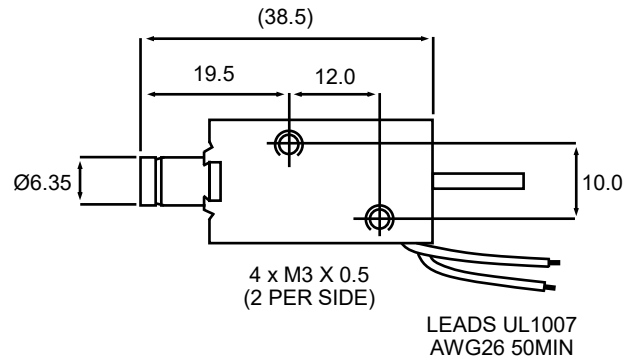

DIMENSIONS IN MM

Forces shown are at 20°C

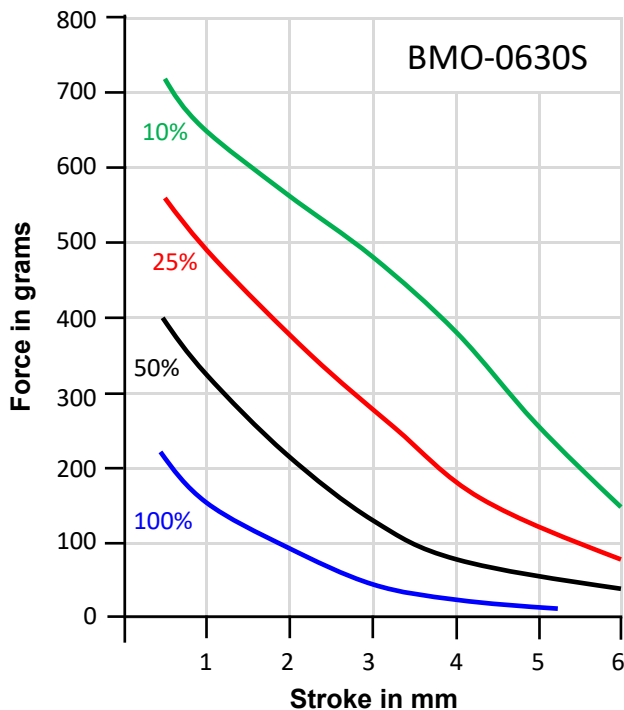

DC Watts
100% Rtg = 2.4W
50% Rtg = 4.8W
25% Rtg = 9.6W
10% Rtg = 24W

** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised **
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 – 663130 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk