

B4 AC & DC LINEAR SOLENOID

Availability
AC or DC Standard Stroke
PULL - THRUST - PULL & THRUST
DC Long Stroke





Solenoid shown in energised position

	Dim 'T'	Stroke 'S'
BAC4	36.1	20.6
BDC4	32	16.6

MS = Milled Slot
BAC4/BDC4 - 9.5
BDC4L - 10


Weight complete 248g
Plunger weight 63g max

Forces shown are at working temperature

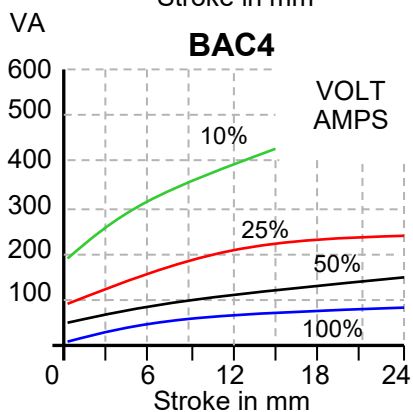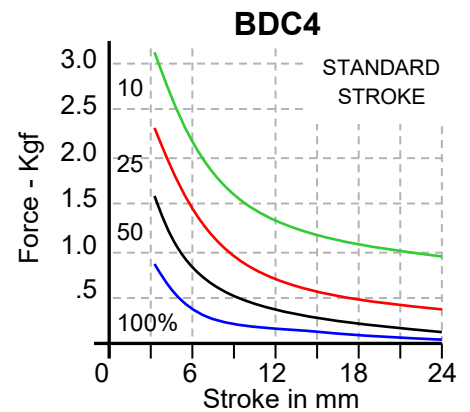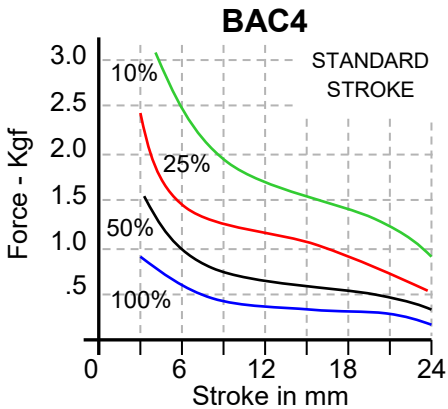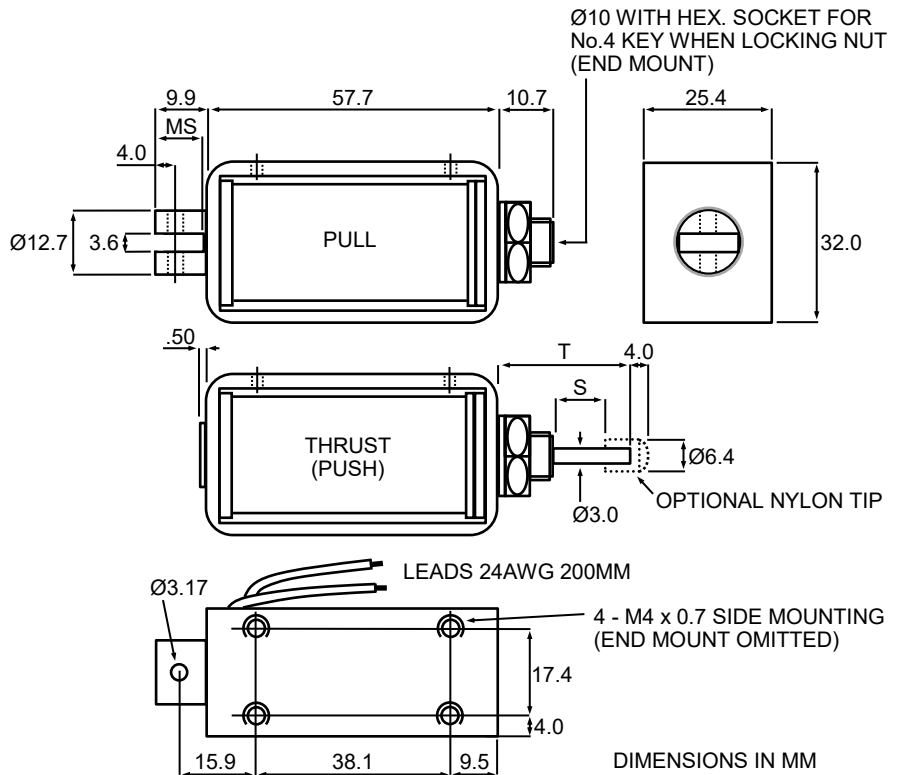

AC Closed VA
 100% Rtg = 17VA
 50% Rtg = 34VA
 25% Rtg = 68VA
 10% Rtg = 200VA

DC Watts
 100% Rtg = 11W
 50% Rtg = 22W
 25% Rtg = 44W
 10% Rtg = 110W

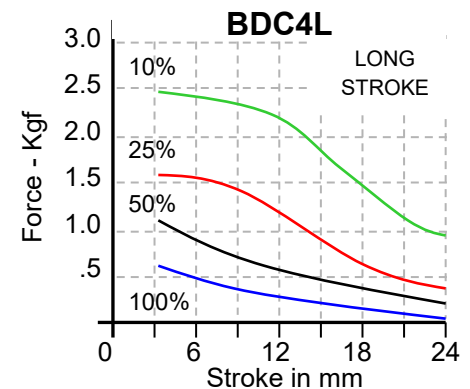

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.