


BDC0
DC LINEAR SOLENOID

Availability
For DC only.
PULL - THRUST - PULL & THRUST
For operation over 24V
please enquire as to feasibility.


Solenoid shown in energised position

Weight complete 19g
Plunger weight 4g max

Forces shown are at working temperature

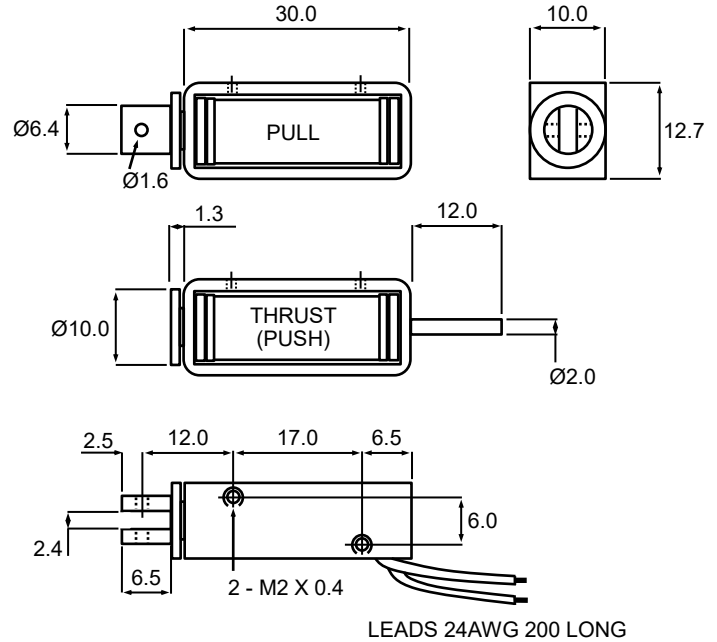

DIMENSIONS IN MM

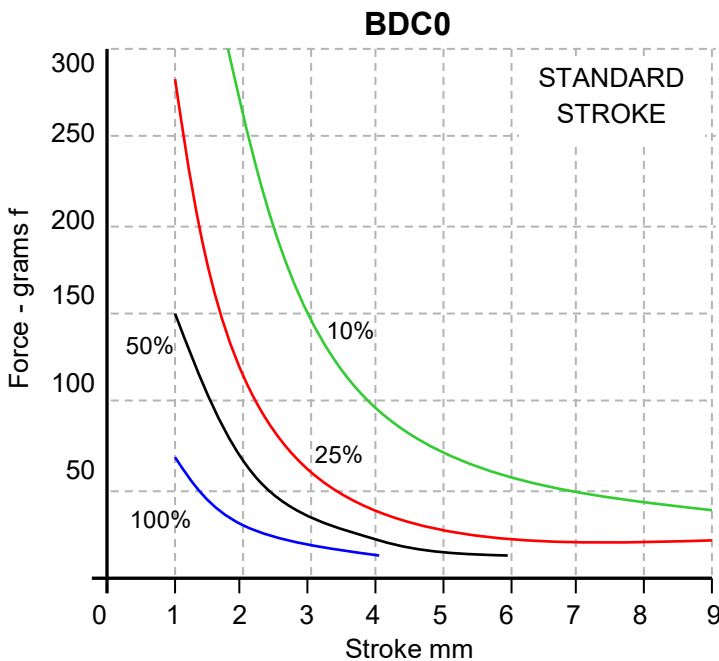

DC Watts
100% Rtg = 2W
50% Rtg = 4W
25% Rtg = 8W
10% Rtg = 20W

** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised **
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

T. +44(0)1638 663535 – 663130 E. sales@hebsbenson.co.uk www.hebsbenson.co.uk